



Applications:

Provide EMC material solutions for EMI & EMS issue for IT devices

- 1.1 Metal rubber absorber to conduct different microwave resonance frequency within the property of loss energy
- 1.2 Noise suppressor for electric devices(Smart phones, Tablets, PCs and etc)
- 1.3 Receiver sensitivity improvement of PEN input (inductive coupling type)
- 1.4 Enhancement of NFC&WPC(PMA/WPC) function within electric devices




performance curve:

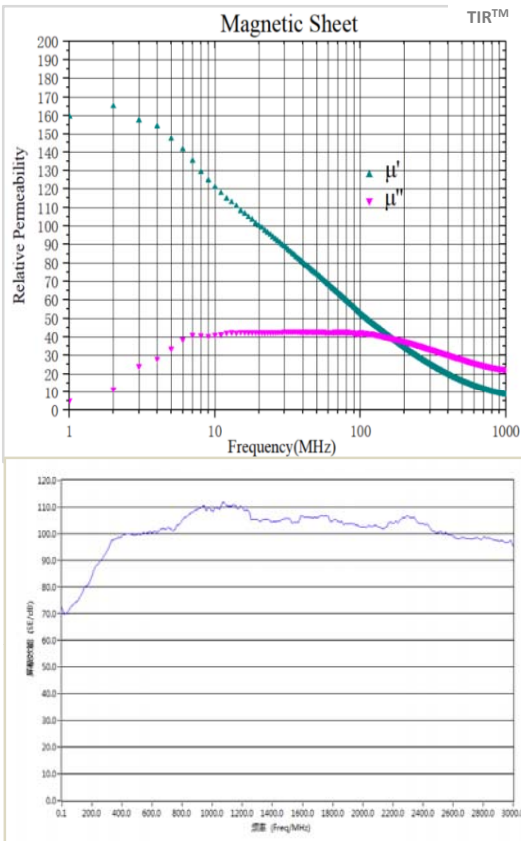


TIR™9150F Series EMI/EMC Absorbing Materials			
Classification	Unit	Values	Test Method
Color	NA	Gray	Visual
Effective frequency	Hz	100MHz -6GHz	NA
Surface resistance (min.)	Ω	>1 x 10 ³	ASTM D257
Permeability (at 1MHz)	μ' (1MHz)	150±20	E4991A
Specific gravity	g/cm ³	3	ASTM D297
Temperature range	°C	-40 to +150	NA
Storage conditions	-	0-30°C/60%±10R.H	NA
Shelf life	month	12	NA
Standard thickness	mm	0.05~0.1mmT	
Standard size	mm	300mm*50M	

Product mix:

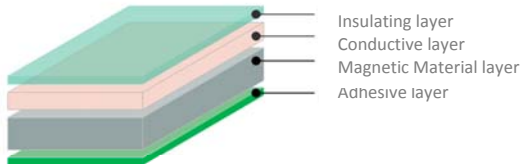

Product identification → TIR9150 F - 0.05T - P1 - A1

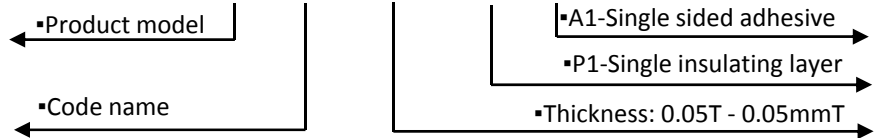

Gap Fillers | Phase Change Materials | Thermally Conductive Insulators | Thermally Conductive Greases | Thermally Conductive Adhesive Tapes

Canada: TEL:+001-604-2998559 E-mail: sales@thermazig.com Http://www.thermazig.com	Taiwan: TEL: +886-2-22771007 E-mail: frances@ziitek.com.tw Http://www.ziitek.com.tw	Dongguan: TEL: +86-769-38801208 E-mail: sales@ziitek.com Http://www.ziitek.com	Kunshan: TEL: +86-512-57816297 E-mail: kelvin@ziitek.com Http://www.ksziitek.com	Chengdu: TEL: +86-28-62379168 E-mail: sales@ziitek.com
--	--	--	--	---

The information and statements herein are believed to be reliable but are not to be construed as a warranty or representation for which we assume legal responsibility. Users should undertake sufficient verification and testing to determine the suitability for their own particular purpose of any information or products referred to herein.